

# PrePak L3 Pretreatment Pack

(Cat. No. PRPKOLOO3)

## General Description

The PrePak L3 pretreatment pack is intended for use with larger RiOs™ and Elix® water purification systems as additional pretreatment to the system Progard® TL pretreatment packs. The pack is designed to provide protection and maintain good performance of the reverse osmosis membranes in each of these systems. The pretreatment pack includes two prefiltration stages to remove particles from the incoming feed water.

### Dimensions (nominal)

Height	535 mm (21.1 in.)
Width	155 mm (6.1 in.)
Depth	79 mm (3.1 in.)

### Connections

PrePak L3 pack must fit securely and leak-free into PrePak wall bracket, WBPRPKL01

Inlet connection at top of pack

Outlet connection at bottom of pack

Double female O-ring port for inlet and outlet

11 mm diameter O-rings

### Contents and materials of construction

Housing, end caps and spacer materials are polypropylene or polyethylene

Thermal-plastic welding (no glues or solvents)

Media content: refer to diagram

### Flow, pressure and temperature specifications

Pressure	6 bar (85 psi) maximum
Flow rate	5 L/min (1.3 gal/min) maximum
Operating temperature	2 to 40°C (35 to 104°F)


### Storage

Storage temperature 2 to 40°C (35 to 104°F)

No shelf expiration limit

### Application

Designed for use with RiOs™ and Elix® systems following pretreatment guidelines for selection of pretreatment pack options

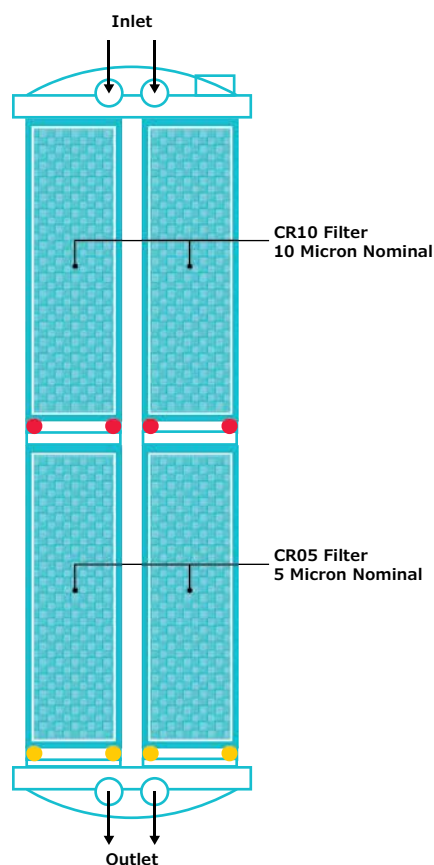

## For More Information

Please visit our website  
[EMDMillipore.com/labwater](http://EMDMillipore.com/labwater)

Merck KGaA  
Frankfurter Strasse 250  
64293 Darmstadt  
Germany

